
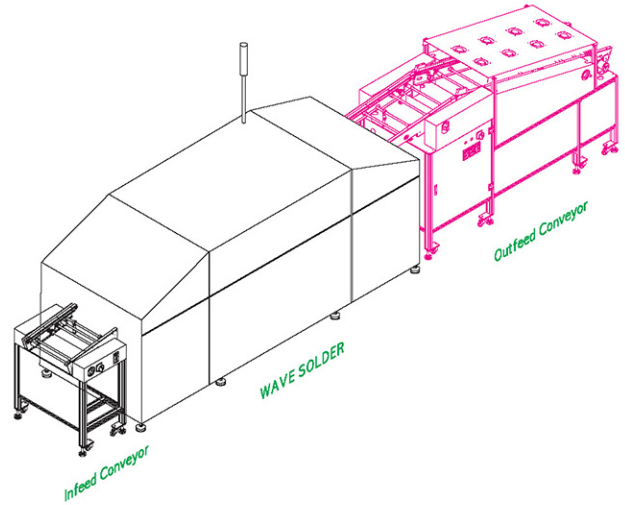


OUTFEED CONVEYOR

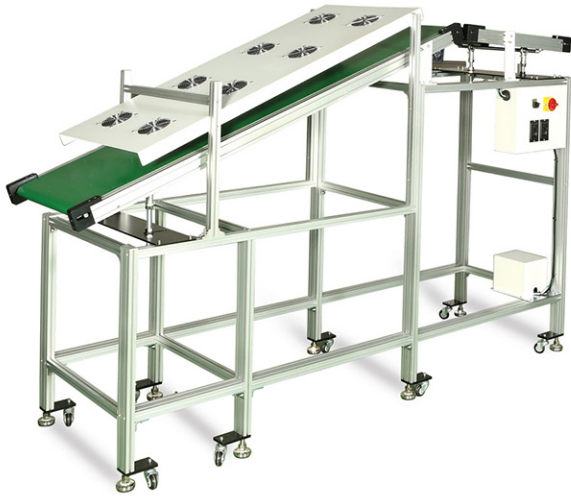


FEATURES

- Always-on driven
- Adjustable angle for conveyor
- Conveyor speed controller
- Cooling fan
- CLEARANCE at Conveyor (Upper : 25mm, Lower : 25mm)

OPTION

- SMEMA Interface
- Conveyor automatic width adjustment
- Touch screen
- Buzzer
- Covers at Lower part
- Selectable rail length
- Selectable belt type (ESD, heat resistance, chain, etc.)
- 3 colored LED tower light
- 06B, PIN chain or Flat belt

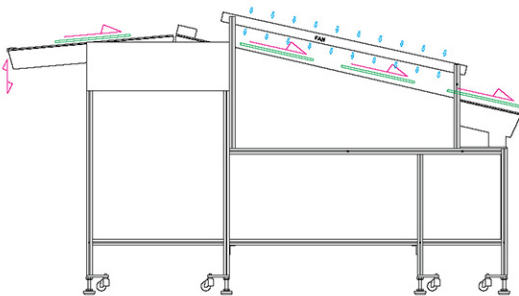

■ Specifications

Customized Manufacturing Available.

MODEL	TYPE	Max.PCB(L×W)mm	Min.PCB(L×W)mm	DIMENSION(L×W×H)mm	POWER	WEIGHT(Kg)
AOC-300S	S	330×250	50×50	2720×620×1500	0.1kVA	170
AOC-300Y	Y	440×330		2720×700×1500		190
AOC-300L	L	530×375		2720×745×1500		210
AOC-300X	XL	530×460		2720×830×1500		230
AOC-3002X	2XL	610×460		2720×830×1500		250